





# STELO




Extruded EN AW-6060 aluminium profile.  
 Die-cast EN AB-44100 aluminium housing (copper free) with high corrosion resistance.  
 Transparent polycarbonate diffuser (opal diffuser on request).  
 Stainless steel screws.  
 Luminaire hard wired with H07RN-F cable.  
 Inspection door perfectly flush with the pole surface.  
 Connection box with fuses.  
 Silicone gaskets.  
**Double powdered paint** in 3 step process:  
 \_ surface treatment containing ceramic nano particles (Bonderite);  
 \_ epoxy primer paint;  
 \_ polyester powder paint with high resistance against UV rays and harsh weather conditions.  
**Lamp not included.**  
**LED versions supplied with LED circuit.**  
 IP65  
 CLASS II   
 IK 10




COLOURS:

-  Aluminium grey (code .14)

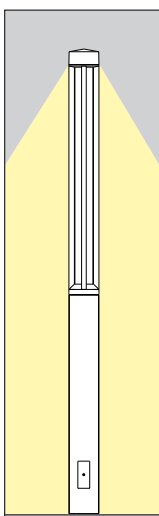

The light distribution is in accordance with light pollution regulations.



**ON REQUEST FIXING BASE**  
 Base 300x300mm  
 Spacing 200x200mm  
 Holes for M16



**S.4129**  
**FLANGE ACCESSORY**  
 Ø 195mm h 800mm flange to be fixed in concrete with stainless steel screws for fixing in the ground.



TRANSPARENT POLYCARBONATE DIFFUSER



**S.4120W**





With led white 3000K 4100lm  
 Rated luminaire luminous flux 1921lm  
 Rated input power 37W 240V

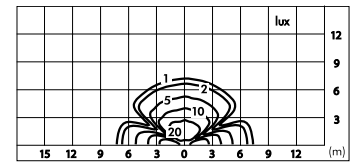

**S.4121**



For lamp HIT-CRI 70W G12 6600lm  
 Rated luminaire luminous flux 4884lm  
 Rated input power 84W 240V

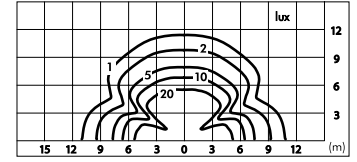

Version with opal polycarbonate diffuser on demand.  
**NOTE: the light distribution will be modified**

