



CONTINUOUS LINE





CONTINUOUS LINE FULLGLASS

To-be-fixed supports and recessing box in extruded anodized EN AW-6060 aluminium housing with high corrosion resistance.
Toughened glass diffuser 15 mm thick.
Luminaire hard wired with H05RN-F single cable.
Fixing bases and recessing box included.
Fast connector IP67 included.



Maximun weight 500 Kg

Colour:

Anodized aluminium (code 13)

The maximum distance between the transformer and the further fitting must not exceed 10 meters (cable 2x1mm²).

Protection class

IP67

Isolation class

CLASS III ⚡

Mechanical resistance of glass

IK 09

Luminaires supplied with LED circuit 24V d.c., power supply not included


This luminaire contains built-in LED modules with energy class:

A **A+** **A++**

The LED modules cannot be changed in the luminaire (Regulation UE 874/2012).

PATENTED

For updated data, see technical sheets and installation instructions available on our website (www.simes.com).

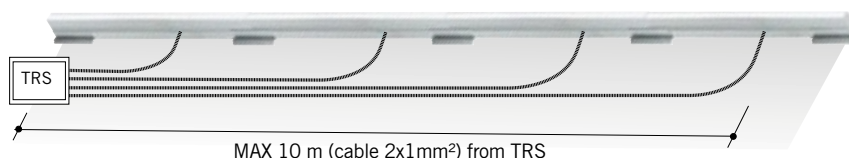

Accessories

S.3407

REMOTE POWER SUPPLY (NOT DIMMABLE) 100W 240V/24V DC
Dimensions 240x40x30mm
IP66



S.3420


REMOTE BOX NOT DIMMABLE POWER SUPPLY 100W 240V/24V DC
5 Exit
Dimensions 260x260x100mm
IP55




S.3402

DIMMABLE REMOTE POWER SUPPLY 1-10V 40W 240V/24V DC
Dimensions 162x43x32mm
IP67






FLUSH VERSION 0,5m




S.7016W



With leds white 3000K CRI80
 Rated luminaire luminous flux 101lm
 Rated input power 5,5W **24V**
 Requires remote power supply 240V/24V DC
 (type S.3402 - S.3407)
 T glass 39°C



FLUSH VERSION 1,0m



S.7011W



With leds white 3000K CRI80
 Rated luminaire luminous flux 202lm
 Rated input power 11W **24V**
 Requires remote power supply 240V/24V DC
 (type S.3402 - S.3407)
 T glass 39°C