




# LOOK



[www.simes.it/look](http://www.simes.it/look)

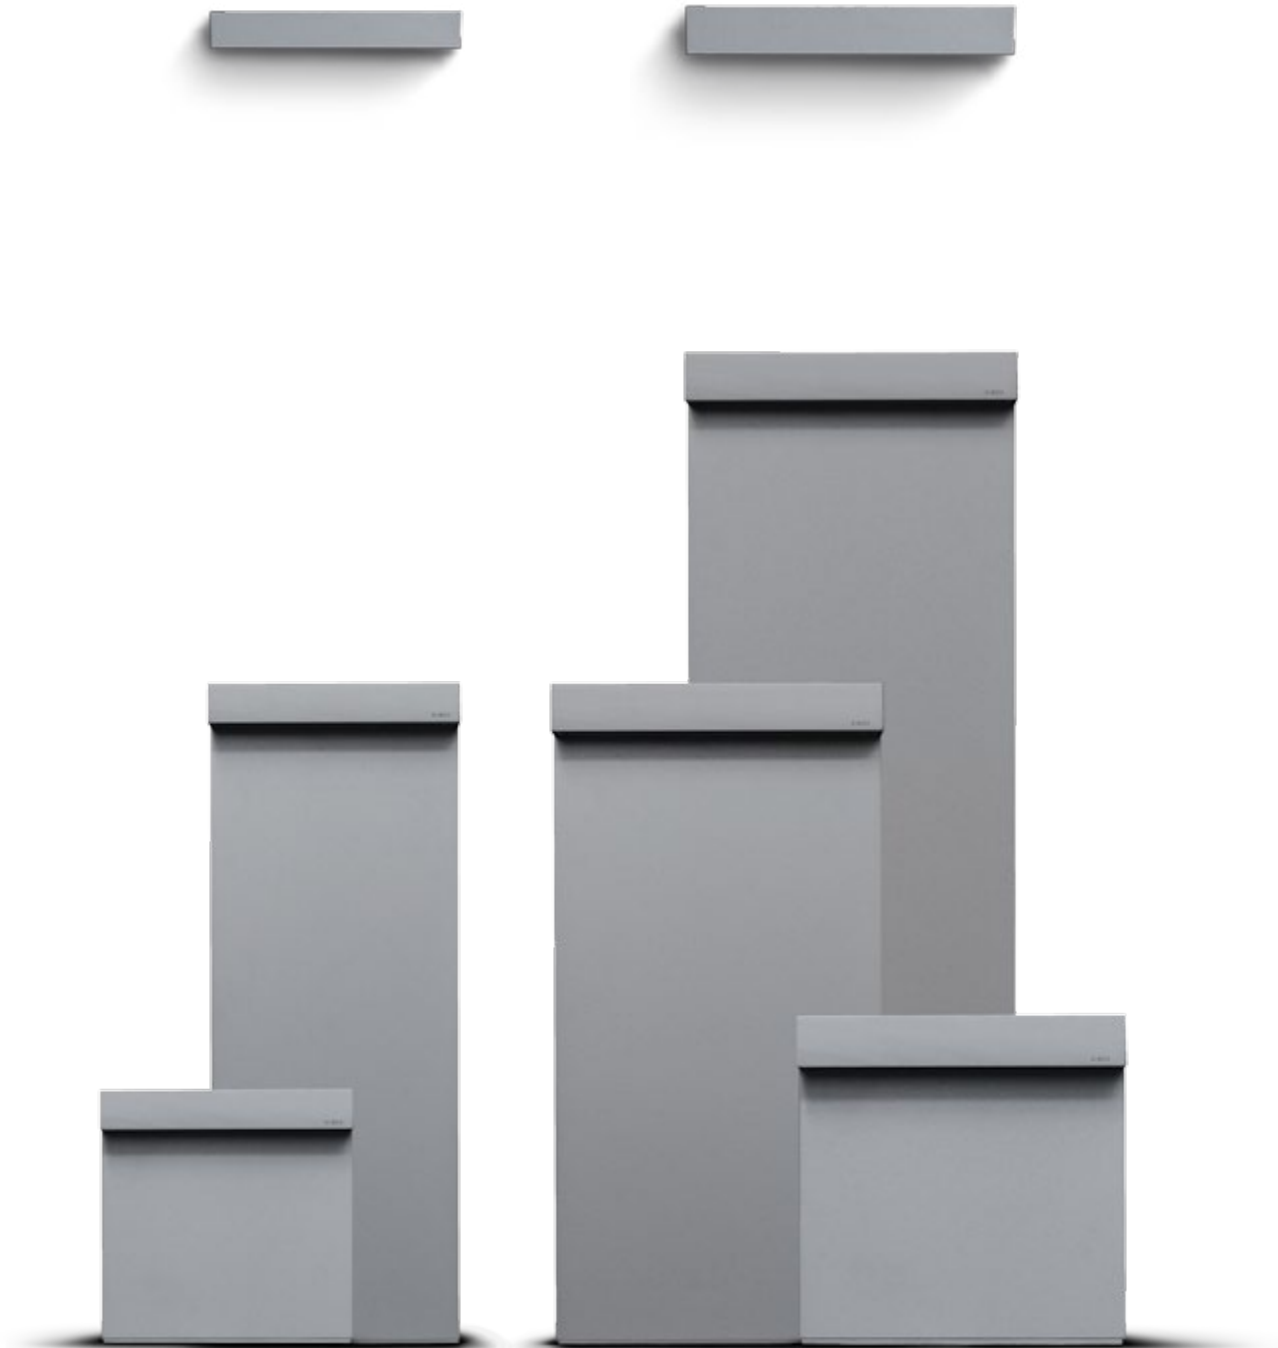

## LOOK

surface mounted lighting for wall and bollard

Die-cast EN AB-47100 aluminium (low copper content) housing with high corrosion resistance.  
 Extruded EN AW-6060 aluminium structure (bollard version) with high corrosion resistance.  
 Toughened glass diffuser.  
 Stainless steel screws.

MINI-LOOK L 220mm hard wired with HO7RN-F cable and fast connector IP68 included.

LOOK L 290mm is supplied with single cable entry.

Silicone gaskets.

**Double powdered paint** in 3 step process:

- \_ surface treatment containing ceramic nano particles (Bonderite);
- \_ epoxy primer paint;
- \_ polyester powder paint with high resistance against UV rays and harsh weather conditions.

### Colours:

- White (code 01)
- Aluminium grey (code 14)
- Burnished bronze (code 20)

### Protection class

IP65

### Isolation class

CLASS II  MINI-LOOK L 220mm

CLASS I  LOOK L 290mm

### Mechanical resistance of glass

IK 06 MINI-LOOK L 220mm

IK 03 LOOK L 290mm



**Luminaires supplied with LED circuit board.**

**This luminaire contains built-in LED modules with energy class:**

**A** **A+** **A++**

**The LED modules cannot be changed in the luminaire (Regulation UE 874/2012).**

*For updated data, see technical sheets and installation instructions available on our website ([www.simes.com](http://www.simes.com)).*

## Accessories




### S.7249

**FLANGE FOR MINI-LOOK BOLLARD**  
 Steel flange with stainless steel screws (to be buried in concrete).




### S.7269

**FLANGE FOR LOOK BOLLARD**  
 Steel flange with stainless steel screws (to be buried in concrete).




MINI-LOOK APPLIQUE  
SINGLE EMISSION L 220mm




**S.7201W**

With leds white 3000K CRI90 1153lm  
Rated luminaire luminous flux 505lm  
Rated input power 13,5W 240V




LOOK APPLIQUE  
SINGLE EMISSION L 290mm




**S.7250W**

With leds white 3000K CRI90 2016lm  
Rated luminaire luminous flux 965lm  
Rated input power 24W 240V




MINI-LOOK APPLIQUE  
DOUBLE EMISSION L 220mm




**S.7202W**

With leds white 3000K CRI90 1153lm  
Rated luminaire luminous flux 414lm  
Rated input power 13,5W 240V




LOOK APPLIQUE  
DOUBLE EMISSION L 290mm




**S.7252W**

With leds white 3000K CRI90 2016lm  
Rated luminaire luminous flux 786lm  
Rated input power 24W 240V

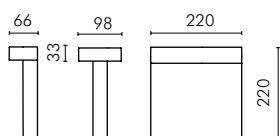


## MINI-LOOK BOLLARD H 220 mm




### S.7206W

With leds white 3000K CRI90 1008lm  
 Rated luminaire luminous flux 355lm  
 Rated input power 12,5W 240V




### S.7215W

With leds white 3000K CRI90 2016lm  
 Rated luminaire luminous flux 687lm  
 Rated input power 25W 240V

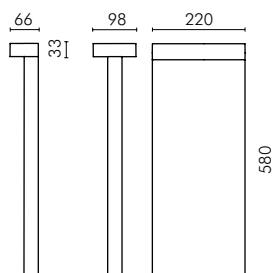


## MINI-LOOK BOLLARD H 580 mm




### S.7211W

With leds white 3000K CRI90 1008lm  
 Rated luminaire luminous flux 355lm  
 Rated input power 12,5W 240V




### S.7220W

With leds white 3000K CRI90 2016lm  
 Rated luminaire luminous flux 687lm  
 Rated input power 25W 240V

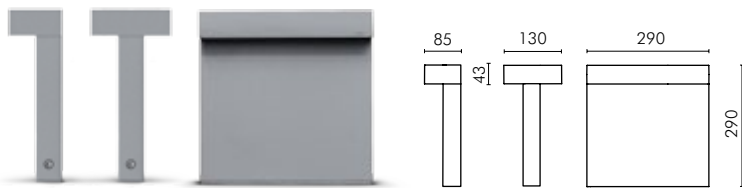


LOOK BOLLARD H 290 mm



**S.7260W**




With leds white 3000K CRI90 2016lm  
Rated luminaire luminous flux 675lm  
Rated input power 24W 240V




**S.7265W**



With leds white 3000K CRI90 4032lm  
Rated luminaire luminous flux 1350lm  
Rated input power 48W 240V

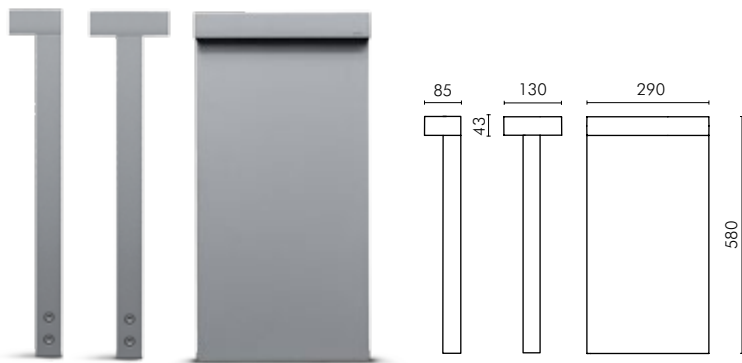


LOOK BOLLARD H 580 mm

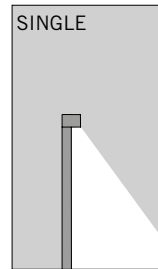

**S.7261W**




With leds white 3000K CRI90 2016lm  
Rated luminaire luminous flux 675lm  
Rated input power 24W 240V




**S.7266W**



With leds white 3000K CRI90 4032lm  
Rated luminaire luminous flux 1350lm  
Rated input power 48W 240V

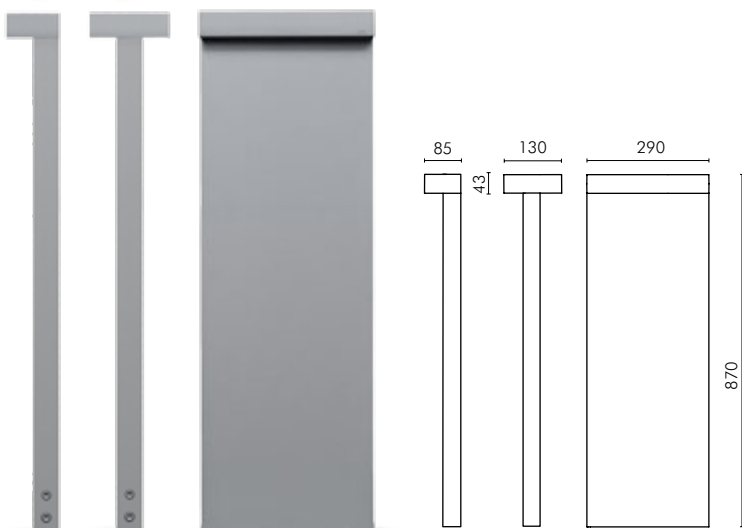


LOOK BOLLARD H 870 mm

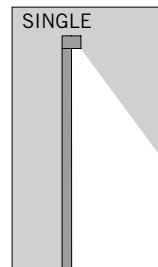

**S.7262W**



With leds white 3000K CRI90 2016lm  
Rated luminaire luminous flux 675lm  
Rated input power 24W 240V



**S.7267W**



With leds white 3000K CRI90 4032lm  
Rated luminaire luminous flux 1350lm  
Rated input power 48W 240V