




LOFT SPOT

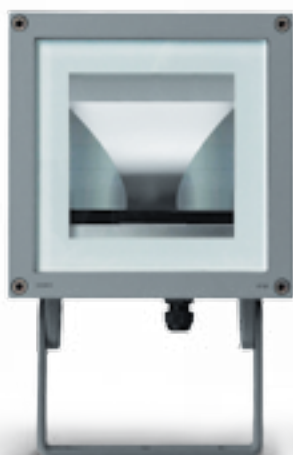

Die-cast EN AB-47100 aluminium housing (copper free) with high corrosion resistance.
 Stainless steel screws.
 Clear toughened glass diffuser.
 MICROLOFT is supplied with a pre-wired H07RN-F cable.
 Single cable entry with PG13,5 cable gland for MINILOFT and LOFT.
 Double cable entry with PG13,5 cable glands for MEGALOFT on request.
 Silicone gaskets.

Double powdered paint in 3 step process:

- _ surface treatment containing ceramic nano particles (Bonderite);
- _ epoxy primer paint;
- _ polyester powder paint with high resistance against UV rays and harsh weather conditions.

Lamp not included.

LED versions are supplied with LED circuit board and power supply.

IP65

CLASS I

CLASS II MICROLOFT and MEGALOFT

IK 06





Commercial building, Adro (Brescia), Italy © Gianattilio Valli

COLOURS:


- White (code .01)
- Aluminium grey (code .14)

PLEASE NOTE

LOFT is supplied without the anti-glare shield accessory.
 The use of the anti-glare shields results in a perfectly defined beam of light with glare free effects outside the main beam angle.





Light effect of LOFT 5° without and with anti-glare shield S.6600




S.6600

ANTI-GLARE SHIELD for HIT-TC CE 35W lamp with 5° beam reflector versions




Light effect of LOFT 30° without and with anti-glare shield S.6601



S.6601

ANTI-GLARE SHIELD for HIT-TC CE 35W lamp with 30° beam reflector versions



S.6638
ELLIPSOIDAL BEAM LENS for MINILOFT SPOT




S.5505

ANTI-GLARE SHIELD for HIT-CRI 70W lamp with 24° and 10° beam reflector versions



S.6648
EXTENSIVE BEAM LENS for MINILOFT SPOT





S.6639
ELLIPSOIDAL BEAM LENS for LOFT SPOT




S.6605
EXTENSIVE BEAM LENS for LOFT SPOT


MICROLOFT SPOT




S.6635 
 With 1 led white 6000K 130lm
 Rated luminaire luminous flux 102lm

S.6635W 
 With 1 led white 3200K 107lm
 Rated luminaire luminous flux 86lm

Rated input power 2,2W 230V






h(m)	7° Ø(m)	6000K E(lx)	3200K E(lx)
1	0.12	4187	3319
2	0.24	1047	830
3	0.36	456	369
4	0.48	262	207
5	0.59	167	133





S.1014
STAKE FOR MICROLOFT SPOT-LIGHT
 In polypropilene
 Colour: black (code .09)
 The 35 mm upper part must stay out of the ground level, according with the norms.

MINILOFT SPOT





S.6665 
 With 3 leds white 6000K 534lm
 Rated luminaire luminous flux 410lm


S.6665W 
 With 3 leds white 3200K 440lm
 Rated luminaire luminous flux 324lm




h(m)	9° Ø(m)	6000K E(lx)	3200K E(lx)
1	0.16	9050	7297
2	0.33	2263	1824
3	0.49	1006	811
4	0.66	566	456
5	0.82	362	292




S.6664 
 With 3 leds white 6000K 534lm
 Rated luminaire luminous flux 411lm

S.6664W 
 With 3 leds white 3200K 440lm
 Rated luminaire luminous flux 329lm


Rated input power 6W 230V




h(m)	22° Ø(m)	6000K E(lx)	3200K E(lx)
1	0.40	2326	1860
2	0.79	581	465
3	1.19	258	207
4	1.58	145	116
5	1.98	93	74




LOFT SPOT





S.6691 
 For lamp TC-TEL 18W Gx24q-2 1200lm
 Rated luminaire luminous flux 468lm
 Rated input power 19W 230V
 Lamp position fixed
 With electronic ballast




h(m)	74° Ø(m)	E(lx)
1	1.50	307
2	3.00	77
3	4.50	34
4	6.01	19
5	7.51	12




S.6694 
 For lamp HIT-TC CE 35W PGJ5 3000lm
 Rated luminaire luminous flux 2190lm
 Rated input power 46W 230V
 Lamp position adjustable ± 15°
 (On request 30° beam reflector)
For lamp on request 20W 1700lm




h(m)	5° Ø(m)	E(lx)	30° Ø(m)	E(lx)
2	0.16	27231	1.03	1758
4	0.32	6808	2.07	439
6	0.48	3026	3.10	195
8	0.64	1702	4.14	110
10	0.80	1089	5.17	70



S.6699 
 For lamp HIT-TC CE 35W PGJ5 3000lm
 Rated luminaire luminous flux 1170lm
 Rated input power 46W 230V
 Lamp position adjustable ± 15°
 (On request 30° beam reflector)
For lamp on request 20W 1700lm





h(m)	24°+25° ØC0(m)	50° ØC90(m)	E(lx)
2	1.07+1.71	4.72	290
4	2.15+3.42	9.46	74
6	3.22+5.13	14.18	33
8	4.30+6.84	18.50	18
10	5.37+8.55	23.64	12




S.1004
STAKE FOR MINILOFT/LOFT SPOT-LIGHT
 In polypropilene
 Colour: black (code .09)
 The 100 mm upper part must stay out of the ground level, according with the norms.

LOFT SLIM SPOT LED



S.6643
 With 5 leds white 6000K 1555lm
 Rated luminaire luminous flux 1282lm




S.6649
 With 5 leds white 6000K 1555lm
 Rated luminaire luminous flux 1136lm




S.6649W
 With 5 leds white 3200K 1280lm
 Rated luminaire luminous flux 1032lm

Rated input power 17,7W 240V

S.1004
STAKE FOR MINILOFT/LOFT SPOT-LIGHT
 In polypropilene Colour: black (code .09)
 The 100 mm upper part must stay out of the ground level, according with the norms.




h(m)	Ø(m)	6000K	3200K
		E(lx)	E(lx)
2	0.29	10007	8556
4	0.59	2502	2139
6	0.88	1112	951
8	1.17	625	535
10	1.47	400	342




h(m)	Ø(m)	6000K	3200K
		E(lx)	E(lx)
2	1.04	1076	996
4	2.08	269	249
6	3.13	120	111
8	4.17	67	62
10	5.21	43	40


MEGALOFT SLIM SPOT LED



S.6662
 With 9 leds white 6000K 2808lm
 Rated luminaire luminous flux 2356lm




S.6666
 With 9 leds white 6000K 2808lm
 Rated luminaire luminous flux 2116lm




S.6666W
 With 9 leds white 3200K 2304lm
 Rated luminaire luminous flux 1808lm

Rated input power 30W 240V





h(m)	Ø(m)	6000K	3200K
		E(lx)	E(lx)
4	0.57	4463	3762
8	1.15	1116	941
12	1.72	496	418
16	2.29	279	235
20	2.87	179	150





h(m)	Ø(m)	6000K	3200K
		E(lx)	E(lx)
4	2.05	498	423
8	4.11	125	106
12	6.16	55	47
16	8.22	31	26
20	10.27	20	17

MEGALOFT SLIM FLOOD ASYMMETRIC





S.6668
 For lamp HIT-TC CRI 70W G8,5 6600lm
 Rated luminaire luminous flux 2754lm
 Rated input power 79W 230V
 With electronic ballast




h(m)	24°+25°	50°	E(lx)
	ØCo(m)	ØC90(m)	
2	1.07+1.71	4.72	638
4	2.15+3.42	9.46	163
6	3.22+5.13	14.18	73
8	4.30+6.84	18.50	40
10	5.37+8.55	23.64	26


MEGALOFT SPOT SLIM SYMMETRIC



S.6679
 For lamp HIT-CRI 70W G12 6600lm
 Rated luminaire luminous flux 4422lm
 Rated input power 79W 230V
 With electronic ballast
 (On request 10° beam reflector)



S.1005
STAKE FOR MEGALOFT SPOT-LIGHT
 In polypropilene Colour: black (code .09)
 The 100 mm upper part must stay out of the ground level, according with the norms.



h(m)	Ø(m)	24°	10°	E(lx)
		E(lx)	Ø(m)	
4	1.72	730	0.73	4871
8	3.43	183	1.46	1218
12	5.15	81	2.18	541
16	6.86	46	2.91	304
20	8.58	29	3.64	195

