



# EOS



Die-cast EN AB-47100 aluminium housing (copper free) with high corrosion resistance.  
Opal toughened glass diffuser.  
Stainless steel screws  
Single cable entry for MINIEOS SQUARE.  
Double cable entries.  
Dutral gaskets.

**Double powdered paint** in 3 step process:

- \_ surface treatment containing ceramic nano particles (Bonderite);
- \_ epoxy primer paint;
- \_ polyester powder paint with high resistance against UV rays and harsh weather conditions.

**Lamp not included.**

**LED versions are supplied with LED circuit.**

IP55 for MINIEOS SQUARE and MEGAEOS

IP65

CLASSE I

IK 05 for MINIEOS SQUARE

IK 06



Millennium Bridge, Chicago, USA - Arch. Frank Gehry © Michel Foti / Sistemalux


**COLOURS:**

- Black (code 09)
- Aluminium grey (code 14)
- Rusty corten (code 18)




**RECESSING BOX**

All EOS wall recessed luminaires must be installed with the recessing box. Recessing box must be perfectly installed at wall level.



The light distribution is in accordance with light pollution regulations.



**LED BLUE** available on request




**S.4350**

**EOS BOLLARD ACCESSORY**

Die-cast aluminium column.  
Base 240 x 160 mm  
H = 550 mm  
(Order luminaire EOS SQUARE separately)

- Black (code 09)
- Aluminium grey (code 14)





**S.4372**


**FLANGE FOR EOS BOLLARD**

Steel flange with stainless steel screws (to be fixed in concrete).

MINIEOS SQUARE LED





**S.4610**   
 With leds white 6000K 260lm  
 Rated luminaire luminous flux 49lm




**S.4610W**   
 With leds white 3200K 215lm  
 Rated luminaire luminous flux 40lm


Rated input power 4W 230V  
 Recessing box not included

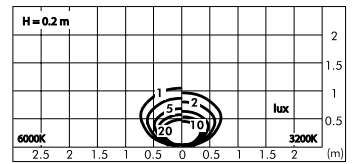



**S.4613**  
**RECESSING BOX**  
 for MINIEOS SQUARE  
 98 x 98 mm  
 Width 95 mm







EOS SQUARE



**S.4608**   
 For lamp HIT-TC CRI 35W G8,5 3300lm  
 Rated luminaire luminous flux 363lm  
 Rated input power 46W 230V  
 With electronic ballast  
 Recessing box not included



**S.4609**   
 For lamp TC-D 18W G24d-2 1200lm  
 Rated luminaire luminous flux 120lm  
 Rated input power 22W 230V  
 Recessing box not included

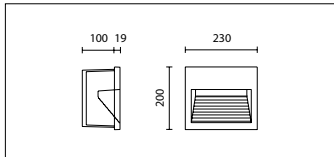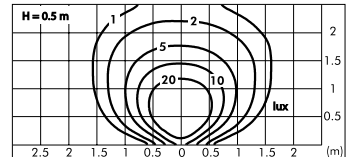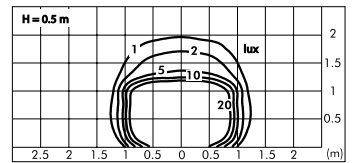



**S.4605**   
 With leds white 6000K 1180lm  
 Rated luminaire luminous flux 246lm




**S.4605W**   
 With leds white 3200K 971lm  
 Rated luminaire luminous flux 186lm


Rated input power 14W 230V  
 Recessing box not included

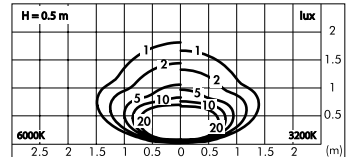



**S.4343**  
**RECESSING BOX** for EOS SQUARE  
 217 x 187 mm Width 100 mm







MEGAEOS SQUARE






**S.4639**   
 For lamp TC-F 36W 2G10 2800lm  
 Rated luminaire luminous flux 252lm  
 Rated input power 41W 230V  
 Recessing box not included



**S.4640**   
 For lamp HIT-DE 70W Rx7s 6500lm  
 Rated luminaire luminous flux 780lm  
 Rated input power 84W 230V  
 Recessing box not included

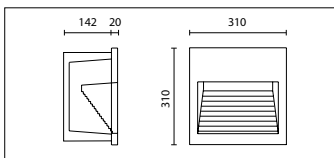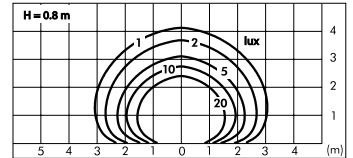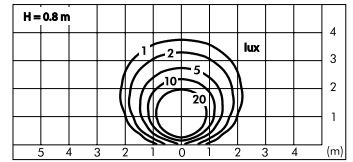



**S.4641**   
 For lamp HIT-DE 150W Rx7s 13250lm  
 Rated luminaire luminous flux 1590lm  
 Rated input power 149W 230V  
 Recessing box not included


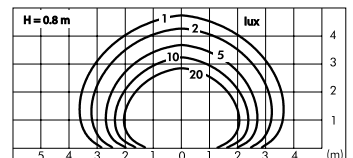



**S.4633.12**  
**RECESSING BOX**  
 for MEGAEOS SQUARE  
 284 x 284 mm  
 Width 142 mm



## MINIEOS RECTANGULAR



**S.4629**   
 For lamp TC-D 10W G24d-1 600lm  
 Rated luminaire luminous flux 36lm  
 Rated input power 15W 230V  
 (Use only OSRAM lamps made in EUROPE) Recessing box not included

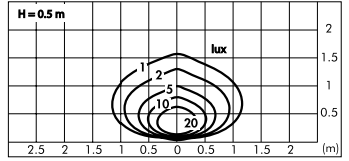


**S.4621**   
 With leds white 6000K 472lm  
 Rated luminaire luminous flux 63lm

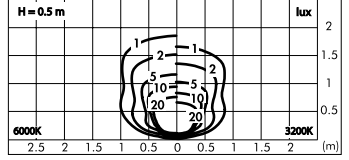


**S.4621W**   
 With leds white 3200K 388lm  
 Rated luminaire luminous flux 45lm


Rated input power 6W 230V  
 Recessing box not included



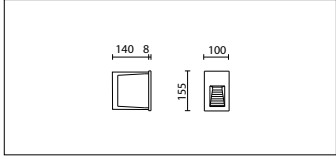


**S.4623**  
**RECESSING BOX** for MINIEOS RECTANGULAR  
 145 x 90 mm Width 140 mm



## EOS RECTANGULAR



**S.4619**   
 For lamp TC-D 26W G24d-3 1800lm  
 Rated luminaire luminous flux 162lm  
 Rated input power 31W 230V  
 Recessing box not included

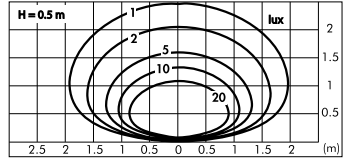


**S.4615**   
 With leds white 6000K 1416lm  
 Rated luminaire luminous flux 241lm

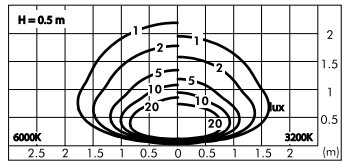

**S.4615W**   
 With leds white 3200K 1165lm  
 Rated luminaire luminous flux 178lm

Rated input power 17W 230V  
 Recessing box not included

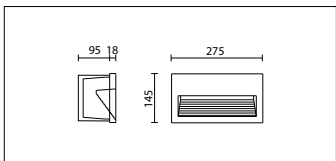

**S.4523**  
**RECESSING BOX** for EOS RECTANGULAR  
 263 x 135 mm Width 95 mm

VN POPOLO DI POETI DI ARTISTI DI EROI  
DI SANTI DI PENSATORI DI SCIENZIATI  
DI NAVIGATORI DI TRASMIGRATORI

