


Housing/Frame and outside reflector: die-cast aluminium with wide cooling fins.

Reflector: in polished 99,85 aluminium with glass protection.

Coating: In several stages. First stage: grey epoxy-cationic electrocoating, resistant to corrosive and saline environments. Second stage: UV stabilising priming; final stage: rough finish with frosted acrylic paint.

Equipment: Bracket with adjustment protractor scale for accurate aiming of the floodlight. Supplied with fixing pin to prevent aiming variations.

Rubber cable gland, Ø " gas thread (min. cable Ø 9, max Ø12).

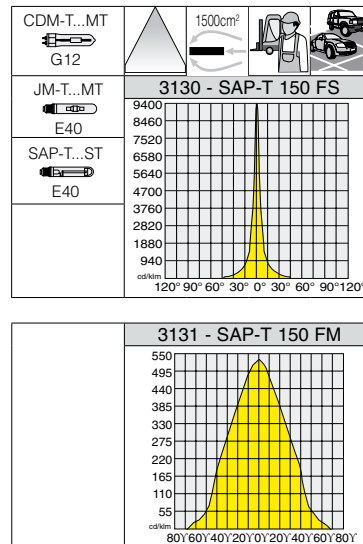


3130 Tex - narrow beam				
		CNRL		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
CDM-T 150	silver + graphite	12.30	326020-00	4200K - 12700lm - Ra>80
JM-T 250	silver + graphite	13.00	326021-00	4000K - 20000lm - Ra 80
SAP-T 150	silver + graphite	12.30	326022-00	2000K - 17200lm - Ra 40
SAP-T 250	silver + graphite	13.00	326023-00	2000K - 33000lm - Ra 40


3131 Tex - medium beam				
		CNRL		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
CDM-T 150	silver + graphite	12.30	326030-00	4200K - 12700lm - Ra>80
JM-T 250	silver + graphite	13.00	326031-00	4000K - 19000lm - Ra 80
SAP-T 150	silver + graphite	12.30	326032-00	2000K - 17200lm - Ra 40
SAP-T 250	silver + graphite	13.00	326033-00	2000K - 33000lm - Ra 40

3132 Tex - wide beam				
		CNRL		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
CDM-T 150	silver + graphite	12.30	326040-00	4200K - 12700lm - Ra>80
JM-T 250	silver + graphite	13.00	326041-00	4000K - 19000lm - Ra 80
SAP-T 150	silver + graphite	12.30	326042-00	2000K - 17200lm - Ra 40
SAP-T 250	silver + graphite	13.00	326043-00	2000K - 33000lm - Ra 40



acc. 330 single frame	
s. silver	998062-00
graphite	998063-00
In die-cast, cationic electrocoated aluminium. For use with acc. 352.	




acc. 331 double frame	
s. silver	998064-00
graphite	998065-00
In die-cast, cationic electrocoated aluminium. For use with acc. 352.	




acc. 352 bracket for frame	
stainless steel	998080-00
In sheet steel. To use itself with the acc. 330 for the application to wall.	



acc. 332 bracket for frame	
s. silver	998066-00
graphite	998067-00
In steel sheet. For the installation to wall or ground.	



acc. 151 Lion cube	
s. silver	991365-00
Made of die-cast aluminium. To be used when installing the products on poles ø120.	



acc. 93 conveyor	
black	995708-00
Used for conveying the light beam in a single direction.	

