




MINISLOT AVANT-GARDE



www.simes.it/minislot-avantgarde


Light fitting in die-cast EN AB-47100 and extruded EN AW-6060 aluminium housing (copper free) with high corrosion resistance.
 Main reflector in 99.98% pure aluminium.
 Secondary reflector with 88 multi-faceted mirrors, in polymers covered with 99.98% pure aluminium.
 Clear toughened glass 8 mm thick.
 Stainless steel screws.
 Electrical wiring with fast connector.
 Silicone gaskets.
Double powdered paint in 3 step process:
 _ surface treatment containing ceramic nano particles (Bonderite);
 _ epoxy primer paint;
 _ polyester powder paint with high resistance against UV rays and harsh weather conditions.
Lamp not included.
 IP65
 CLASS II 
 IK08



Carrickfergus Waterfront, UK © Havells Sylvania Fixtures UK Ltd

COLOUR:


- Aluminium grey (code 14)



S.2809

POLE BASE COVER

For pole with base and pole to be buried Ø102mm or Ø121mm.
 Die-cast aluminium housing.

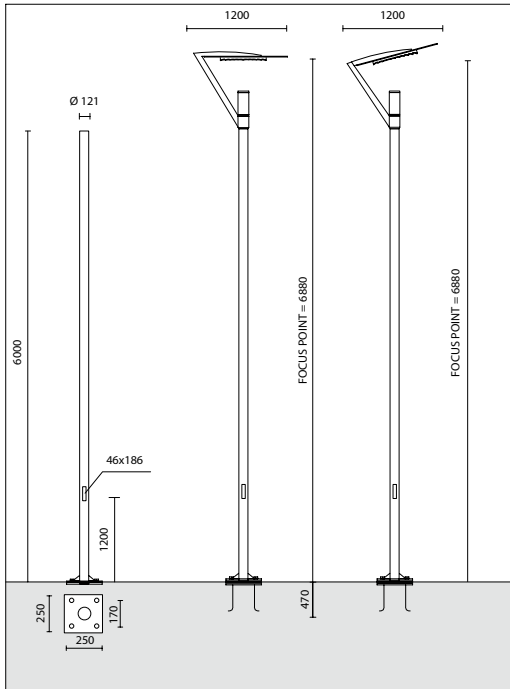

S.2848

Ø 121 mm CYLINDRICAL POLE WITH BASE


Pole and base in galvanized steel, with polyester powdered paint with high resistance against UV rays and corrosion. Galvanization, sections and thickness in compliance with UNI EN 40 norms.
 Pole total height 6.00 m
 Provided with inspection door and terminal board.

MINISLOT AVANT-GARDE INSTALLED ON S.2848 POLE:
 Finished product total height 7.13 m



S.2841.09

ACCESSORY AGAINST LIGHT POLLUTION
 With this accessory the light emission above 90° is 0%



S.2840

PLANTED ROOT


h = 470 mm and bolts in galvanized steel with M16 threads.
 Suggested reinforced concrete footstall dimension **::


A = 0.7 m

B = 1 m





** Footstall dimension can be calculated according to your country norms and ground properties.


ASYMMETRIC VERSION





S.3953 

For lamp HIT-CRI 70W G12 6600lm
 Rated luminaire luminous flux 2904lm
 Rated input power 84W





S.3954 

For lamp HIT-CRI 150W G12 14000lm
 Rated luminaire luminous flux 6160lm
 Rated input power 149W








SYMMETRIC VERSION



S.3963 

For lamp HIT-CRI 70W G12 6600lm
 Rated luminaire luminous flux 3036lm
 Rated input power 84W



S.3964 

For lamp HIT-CRI 150W G12 14000lm
 Rated luminaire luminous flux 6440lm
 Rated input power 149W

